




Cable Thermocouple With Ceramic Pocket

Type Designation	CTC
Measuring Range	-100 to + 800° C
Common Sensor Types	K,J,N,T,E
Common Diameters	Ø 2.0 to 10.0mm
Common Insulation	Glass fibre
Common Stranding	7x0.2
Common Sheaths	Recrystallised Alumina, Pythagoras
Tail Detail	50mm tails, 10mm Tinned
Application Notes	<ul style="list-style-type: none"> ■ Many ceramic cast shapes are possible ■ Ideal for high volume manufacture and fixing into original equipment ■ Very small sizes available ■ A wide variety of encapsulants for pocket filling
Special Options	<ul style="list-style-type: none"> ■ Duplex ■ Stainless Steel Overbraid

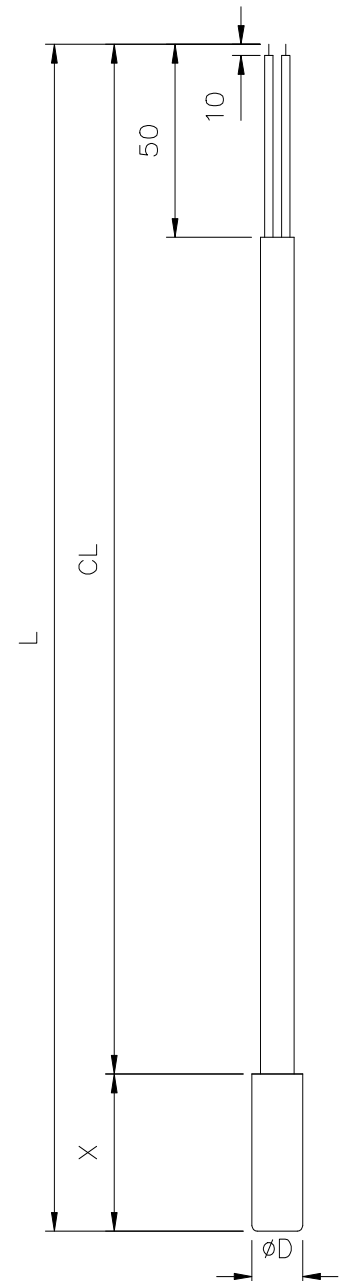

Visit the Peak Sensors Online design guide at www.peakensors.com

PEAK SENSORS LTD

Kelvin House | Station Lane Industrial Estate | Chesterfield | S41 9QX | United Kingdom

TEL: **+44 (0)1246 261999** | FAX: **+44 (0)1246 261888**

The technical information provided on any pages of the Peak Sensors brochure is advisory only and should not be relied on for any design, process or production. We will be pleased to undertake specific technical advisory work under our normal terms of service. Peak Sensors Ltd accepts no responsibility for any loss or damage caused through reliance on any information contained therein.