





Cable Thermocouple with Pipe Clamp

Type Designation	CTK
Measuring Range	100 to + 300° C
Common Sensor Types	K,J,N,T,E
Suitable pipe diameters	Ø 10mm to 500mm
Common Insulation	PVC, PTFE
Common Stranding	7 x 0.2
Common Sheaths	Stainless Steel
Tail detail	50mm tails, 10mm Tinned
Application Notes	<ul style="list-style-type: none"> ■ For quick fixing to outside of pipe ■ Suitable for boilers, frost protection, trip control
Special Options	<ul style="list-style-type: none"> ■ Higher temperatures possible with mineral insulated thermocouple attached (to 800 ° C) ■ Clamp can be orientated in any direction to sensor ■ Duplex ■ Insulated or Grounded junction

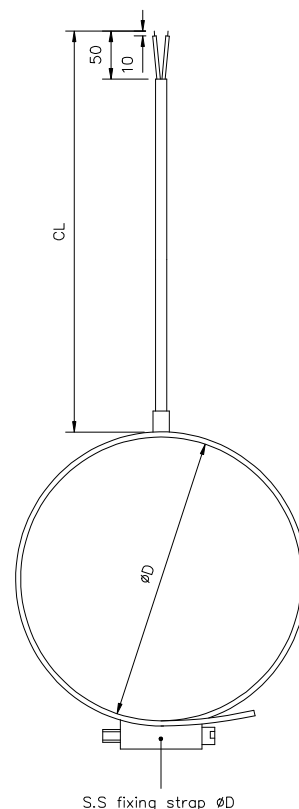

Sensor can be mounted at any angle e.g. 90 deg.

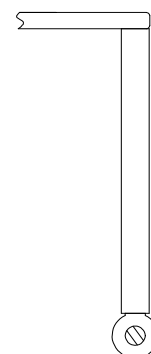

Visit the Peak Sensors Online design guide at
www.peaksensors.com

PEAK SENSORS LTD

Kelvin House | Station Lane Industrial Estate | Chesterfield | S41 9QX | United Kingdom

TEL: **+44 (0)1246 261999** | FAX: **+44 (0)1246 261888**

The technical information provided on any pages of the Peak Sensors brochure is advisory only and should not be relied on for any design, process or production. We will be pleased to undertake specific technical advisory work under our normal terms of service. Peak Sensors Ltd accepts no responsibility for any loss or damage caused through reliance on any information contained therein.